


DIMMER COMPATIBILITY GlowDim

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

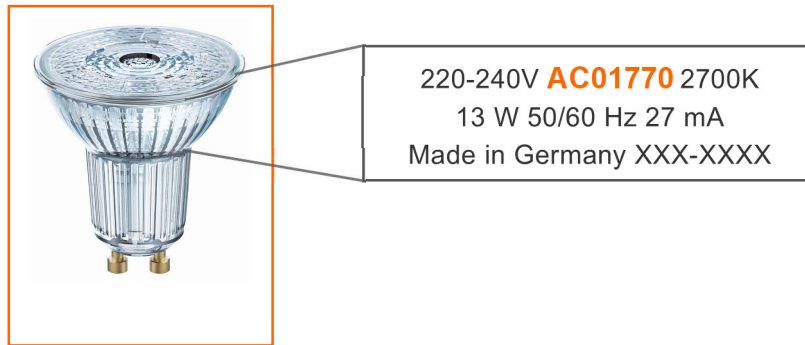

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

| Legend | | | | | | PARATHOM PRO PAR16 | | | | PARATHOM DIM PAR16 | | | |
|---|--------------|----------|--------|------|--------|-------------------------|-----------------------|-------------------------|-----------------------|-------------------------|-----------------------|-------------------------|-----------------------|
| Good dimmability with indicated number of lamps (dimming range greater than 75%) | | | | | | 50 36" | | 80 36" | | 80 36" | | 80 60" | |
| Limited dimmability with indicated number of lamps (dimming range smaller than 75%) | | | | | | | | | | | | | |
| Undesired dimmability | | | | | | EAN / Basic Code | | EAN / Basic Code | | EAN / Basic Code | | EAN / Basic Code | |
| Not tested | | | | | | 4058075448728 / AC24597 | | 4058075449107 / AC24600 | | 4058075449282 / AC24603 | | 4058075449220 / AC24606 | |
| | | | | | | 4058075448704 / AC24598 | | 4058075449084 / AC24601 | | 4058075449288 / AC24604 | | 4058075449183 / AC24608 | |
| | | | | | | 4058075448681 / AC24599 | | 4058075449060 / AC24602 | | 4058075449244 / AC24605 | | 4058075449206 / AC24607 | |
| Dimmer | | | | | | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps |
| Brand | Model | Voltage | Power | Type | | | | | | | | | |
| ABB | STD 50-3 | 230/50Hz | 60-500 | L | 58-0% | 57-0% | 86-0% | 74-0% | 85-0% | 87-0% | 85-0% | 87-0% | |
| Altenburger | 50_3 | 230/50Hz | | | 93-0% | 92-0% | 93-0% | 92-0% | 92-0% | 92-0% | 92-0% | 92-0% | |
| AURORA | DSP 400 | 230/50Hz | 400 | L | 90-0% | 89-0% | 90-0% | 89-0% | 89-0% | 89-0% | 89-0% | 89-0% | |
| Berker | 2861 | 230/50Hz | 50-420 | U | 89-0% | 88-0% | 89-0% | 88-0% | 88-0% | 88-0% | 88-0% | 88-0% | |
| Bticino | L/N/NT4411N | 230/50Hz | | | 94-0% | 93-0% | 94-0% | 93-0% | 93-0% | 92-0% | 93-0% | 92-0% | |
| Busch-Jaeger | 6513 U-102 | 230/50Hz | 420 | T | 95-2% | 93-0% | | | | | | | |
| Busch-Jaeger | 6523 U-102 | 230/50Hz | 40-420 | T | 95-3% | 93-3% | 95-3% | 93-3% | 94-3% | 93-3% | 94-3% | 93-3% | |
| Busch-Jaeger | 2250 U | 230/50Hz | 60-600 | L | 50-1% | 87-1% | 93-1% | 87-1% | 90-1% | 87-1% | 90-1% | 87-1% | |
| Busch-Jaeger | 6526 U | 230/50Hz | | | 94-40% | 93-2% | | | | | | | |
| CENTURY CONTROL | MULTI DIMMER | 230/50Hz | 60-600 | U | 91-0% | 90-0% | 91-0% | 90-0% | 90-0% | 90-0% | 90-0% | 90-0% | |
| DimMax | 420SL | 230/50Hz | 200 | L/T | 93-0% | 91-0% | 93-0% | 91-0% | 92-0% | 91-0% | 92-0% | 91-0% | |
| DINUY | RE EL1 LE1 | 230/50Hz | 400 | LED | 92-0% | 91-0% | 92-0% | 91-0% | 91-0% | 91-0% | 91-0% | 91-0% | |
| ELKO | 400GU | 230/50Hz | | | 94-3% | 91-0% | 94-3% | 91-0% | 92-3% | 90-0% | 92-3% | 90-0% | |
| ELKO | 315GLE | 230/50Hz | 20-315 | T | 92-3% | 90-0% | 92-3% | 90-0% | 91-3% | 90-0% | 91-3% | 90-0% | |
| ELKO | 600GLE/I | 230/50Hz | | | 92-0% | 91-0% | 92-0% | 91-0% | 91-0% | 91-0% | 91-0% | 91-0% | |
| ELKO | 600GU | 230/50Hz | 40-600 | U | 92-2% | 91-2% | 92-2% | 91-2% | 91-2% | 91-2% | 91-2% | 91-2% | |

Information about the lamp type


Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT GlowDim

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.

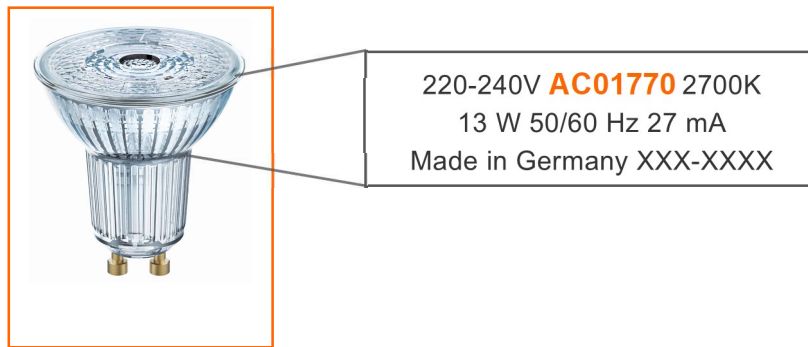

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.



| Legend | | | | | | PARATHOM PRO PAR16 | | | | | | | |
|---|--------------|----------|--------|------|--------|-------------------------|-------|-------------------------|-------|-------------------------|-------|-------------------------|--|
| Good dimmability with indicated number of lamps (dimming range greater than 75%) | | | | | | 50 36° | | 80 36° | | 80 36° | | 80 60° | |
| Limited dimmability with indicated number of lamps (dimming range smaller than 75%) | | | | | | | | | | | | | |
| Undesired dimmability | | | | | | EAN / Basic Code | | EAN / Basic Code | | EAN / Basic Code | | EAN / Basic Code | |
| Not tested | | | | | | 4058075448728 / AC24597 | | 4058075449107 / AC24600 | | 4058075449282 / AC24603 | | 4058075449220 / AC24606 | |
| | | | | | | 4058075448704 / AC24598 | | 4058075449084 / AC24601 | | 4058075449268 / AC24604 | | 4058075449183 / AC24608 | |
| | | | | | | 4058075448681 / AC24599 | | 4058075449060 / AC24602 | | 4058075449244 / AC24605 | | 4058075449206 / AC24607 | |
| Dimmer | | | | | | Dimming range 1 Lamp | | Dimming range 4 Lamps | | Dimming range 1 Lamp | | Dimming range 4 Lamps | |
| Brand | Model | Voltage | Power | Type | | | | | | | | | |
| ABB | STD 50-3 | 230/50Hz | 60-500 | L | 58-0% | 57-0% | 86-0% | 74-0% | 85-0% | 87-0% | 85-0% | 87-0% | |
| Altenburger | 50_3 | 230/50Hz | | | 93-0% | 92-0% | 93-0% | 92-0% | 92-0% | 92-0% | 92-0% | 92-0% | |
| AURORA | DSP 400 | 230/50Hz | 400 | L | 90-0% | 89-0% | 90-0% | 89-0% | 89-0% | 89-0% | 89-0% | 89-0% | |
| Berker | 2861 | 230/50Hz | 50-420 | U | 89-0% | 88-0% | 89-0% | 88-0% | 88-0% | 88-0% | 88-0% | 88-0% | |
| Bticino | L/N/NT4411N | 230/50Hz | | | 94-0% | 93-0% | 94-0% | 93-0% | 93-0% | 92-0% | 93-0% | 92-0% | |
| Busch-Jaeger | 6513 U-102 | 230/50Hz | 420 | T | 95-2% | 93-0% | | | | | | | |
| Busch-Jaeger | 6523 U-102 | 230/50Hz | 40-420 | T | 95-3% | 93-3% | 95-3% | 93-3% | 94-3% | 93-3% | 94-3% | 93-3% | |
| Busch-Jaeger | 2250 U | 230/50Hz | 60-600 | L | 50-1% | 87-1% | 93-1% | 87-1% | 90-1% | 87-1% | 90-1% | 87-1% | |
| Busch-Jaeger | 6526 U | 230/50Hz | | | 94-40% | 93-2% | | | | | | | |
| CENTURY CONTROL | MULTI DIMMER | 230/50Hz | 60-600 | U | 91-0% | 90-0% | 91-0% | 90-0% | 90-0% | 90-0% | 90-0% | 90-0% | |
| DimMax | 420SL | 230/50Hz | 200 | L/T | 93-0% | 91-0% | 93-0% | 91-0% | 92-0% | 91-0% | 92-0% | 91-0% | |
| DINUY | RE ELI LE1 | 230/50Hz | 400 | LED | 92-0% | 91-0% | 92-0% | 91-0% | 91-0% | 91-0% | 91-0% | 91-0% | |
| ELKO | 400GLI | 230/50Hz | | | 94-3% | 91-0% | 94-3% | 91-0% | 92-3% | 90-0% | 92-3% | 90-0% | |
| ELKO | 315GLE | 230/50Hz | 20-315 | T | 92-3% | 90-0% | 92-3% | 90-0% | 91-3% | 90-0% | 91-3% | 90-0% | |
| ELKO | 600GLE/I | 230/50Hz | | | 92-0% | 91-0% | 92-0% | 91-0% | 91-0% | 91-0% | 91-0% | 91-0% | |
| ELKO | 600GLI | 230/50Hz | 40-600 | U | 92-2% | 91-2% | 92-2% | 91-2% | 91-2% | 91-2% | 91-2% | 91-2% | |

Angaben zum Lampentyp

Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich



Liste der getesteten Dimmer

DIMMER COMPATIBILITY GlowDim

| Legend | | | | | PARATHOM+ PAR16 50 GLOWdim 36** | PARATHOM PRO AR111 50 GLOWdim* | | | |
|--|--------------|------------------|--------|-----------|---|---|--|-----------------------------|--|
| Good dimmability with indicated number of lamps (dimming range greater than 75%) | | | | |  |  | | | |
| Limited dimmability with indicated number of lamps (dimming range smaller than 75%) | | | | | | | | | |
| Undesired dimmability | | | | | | | | | |
| Not tested | | | | | | | | | |
| | | | | | 4058075608498 / AC32686 | | 4058075608634 / AC32797 4058075608610 / AC32800 | | |
| Dimmer | | | | | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps | |
| Brand | Model | Voltage range | Power | Type | | | | | |
| ABB | STD 50-3 | 230/50Hz | 60-500 | L | 96-6% | 96-5% | 80-13% | 99-27% | |
| Altenburger Electronic | 50,3 | 230/50Hz | | | 98-10% | 95-6% | | | |
| AURORA | DSP400 | 230/50Hz | 400 | T | 93-2% | 94-2% | 99-0% | 99-0% | |
| Berker | 2861 | 230/50Hz | 50-420 | U | 99-2% | 97-2% | 99-6% | 99-19% | |
| Bticino | L/N/NT4411N | 230/50Hz | | | 88-8% | 90-8% | 99-0% | 99-0% | |
| bticino | NT4402N | 230/50Hz | 500 | R | | | | | |
| Busch-Jaeger | 6523 U-102 | 230/50Hz | 40-420 | T | 80-4% | 86-4% | 91-31% | 99-46% | |
| Busch-Jaeger | 6513 U-102 | 230/50Hz | 420 | T | 86-3% | 88-4% | 99-38% | 99-28% | |
| Busch-Jaeger | 2250 U | 230/50Hz | 60-600 | L | | | | | |
| Busch-Jaeger | 6526 U | 230/50Hz | | | | | | | |
| CENTURY CONTROL | MULTI DIMMER | 230/50Hz | 60-600 | U | 93-5% | 94-3% | 99-0% | 99-0% | |
| DimMax | 420SL | 230/50Hz | 200 | L/T | 99-5% | 96-2% | 99-0% | 99-3% | |
| DINUY | RE EL1 LE1 | 230/50Hz | 400 | LED | 100-12% | 99-14% | 99-0% | 99-0% | |
| ELKO | 400GLI | 230/50Hz | | | 85-8% | 91-8% | 60-0% | 99-2% | |
| ELKO | 315GLE | 230/50Hz | 20-315 | T | 94-8% | 94-8% | 99-0% | 99-0% | |
| ELKO | 600GLE/I | 230/50Hz | | | 92-2% | 92-0% | 99-0% | 99-0% | |
| ELKO | 420GLE/I | 230/50Hz | 40-420 | U | 94-4% | 92-4% | 99-10% | 99-4% | |
| ELKO | 600GLI | 230/50Hz | 40-600 | U | 99-8% | 97-2% | 99-12% | 99-6% | |
| ELKO | 1000LRI | 230/50Hz | | | 97-11% | 95-3% | | 99-0% | |
| ELKO | 630GLE | 230/50Hz | 20-630 | U | 99-8% | 97-2% | 99-12% | 99-19% | |
| Eltako | EUD61NPN-UC | 230/50Hz | 5-400 | R / L / C | 100-1% | 100-0% | 99-0% | | |
| Feller | 40600 RLC | 230/50Hz | 20-600 | U | 92-2% | 92-0% | 99-0% | 99-0% | |
| Feller | 40600.RL | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-6% | |
| Feller | 40600.RC | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-19% | |
| Feller | 40420.RLC | 230/50Hz | | | 94-4% | 92-4% | 99-10% | 99-4% | |
| Feller | 40200.LEDxxx | 230/50Hz | | | 98-8% | 96-3% | 99-3% | 99-10% | |
| Feller | 31000 | 230/50Hz | | | 97-11% | 95-3% | | 99-0% | |



*PAR16 and AR111 versions tested with HTM 70 transformer

DIMMER COMPATIBILITY GlowDim

| Legend | | | | | PARATHOM+ PAR16 50 GLOWdim 36** | PARATHOM PRO AR111 50 GLOWdim* | | | |
|--|--------------------|------------------|----------|---------|---|---|--|-----------------------------|--|
| Good dimmability with indicated number of lamps (dimming range greater than 75%) | | | | |  |  | | | |
| Limited dimmability with indicated number of lamps (dimming range smaller than 75%) | | | | | | | | | |
| Undesired dimmability | | | | | | | | | |
| Not tested | | | | | | | | | |
| | | | | | 4058075608498 / AC32686 | | 4058075608634 / AC32797 4058075608610 / AC32800 | | |
| Dimmer | | | | | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps | |
| Brand | Model | Voltage range | Power | Type | | | | | |
| Gira | 030700 | 230/50Hz | 20-525 | T | 95-12% | 96-11% | 99-13% | 99-16% | |
| Gira | 226200 | 230/50Hz | | | 92-10% | 92-10% | 80-0% | 99-0% | |
| Gira | 117600 | 230/50Hz | 50-420 | U | 99-2% | 97-0% | 99-0% | 99-0% | |
| Gira | 217400 | 230/50Hz | 4X20-250 | KNX-U | 96-3% | 95-3% | 99-0% | 99-19% | |
| Hager | WUD87 | 230/50Hz | 400 | LED-U | 96-3% | 93-3% | 99-19% | 99-19% | |
| Hamilton | KP1X40 | 230/50Hz | 400 | | 86-3% | 87-1% | | | |
| Hugo Müller | paladin 872110 led | 230/50Hz | | | 100-12% | 99-14% | 99-0% | 99-0% | |
| Jung | 225 TDE | 230/50Hz | | | 95-12% | 96-11% | 99-13% | 99-16% | |
| Jung | 225 NVDE | 230/50Hz | 20-500 | L | 92-10% | 92-10% | 80-0% | 99-0% | |
| Jung | 254 UDIE1 | 230/50Hz | | | 99-2% | 97-0% | 99-0% | 99-0% | |
| Jung | 3904 REGHE | 230/50Hz | | | 96-3% | 95-3% | 99-0% | 99-19% | |
| Jung | 1224 LEDUCE | 230/50Hz | 3-100 | | 99-4% | 98-4% | 99-0% | 99-0% | |
| Legrand | 574319/574339 | 230/50Hz | 400 | U | 88-8% | 90-8% | 99-0% | 99-0% | |
| Legrand | 572239/572739 | 230/50Hz | 400 | U | 88-8% | 90-8% | 99-0% | 99-0% | |
| Legrand | 078407/079207 | 230/50Hz | 400 | U | 88-8% | 90-8% | 99-0% | 99-0% | |
| Legrand | 048869/048871 | 230/50Hz | 400 | U | 88-8% | 90-8% | 99-0% | 99-0% | |
| Legrand | 067083/048869 | 230/50Hz | 400 | U | 88-8% | 90-8% | 99-0% | 99-0% | |
| Legrand | 665114 | 230/50Hz | 400 | U | 88-8% | 90-8% | 99-0% | 99-0% | |
| Legrand | 770062 | 230/50Hz | 400 | RLC | | 96-0% | 99-2% | 99-1% | |
| Legrand | 099314 | 230/50Hz | 300 | RL | 97-3% | 98-2% | 99-0% | 99-0% | |
| MASTER | DM-DGL | 230/50Hz | 1000 | U / LED | 100-11% | 100-9% | | | |
| MASTER | DM-2500 | 230/50Hz | 2500 | U / LED | | | 99-0% | 99-0% | |
| Merten | MEG5136-0000 | 230/50Hz | | | 94-8% | 94-8% | 99-0% | 99-0% | |
| Merten | MEG 5170-0300 | 230/50Hz | 10-200 | U | | | 99-6% | 99-6% | |
| Merten | MEG5139-0000 | 230/50Hz | | | 92-2% | 92-0% | 99-0% | 99-0% | |
| Merten | MEG5138-0000 | 230/50Hz | | | 94-4% | 92-4% | 99-10% | 99-4% | |



*PAR16 and AR111 versions tested with HTM 70 transformer

DIMMER COMPATIBILITY GlowDim

| Legend | | | | | PARATHOM+ PAR16 50 GLOWdim 36** | | PARATHOM PRO AR111 50 GLOWdim* | |
|--|------------------|------------------|---------|--------|---|-----------------------------|---|-----------------------------|
| Good dimmability with indicated number of lamps (dimming range greater than 75%) | | | | |  | |  | |
| Limited dimmability with indicated number of lamps (dimming range smaller than 75%) | | | | | EAN/ Basic Code | | EAN/ Basic Code | |
| Undesired dimmability | | | | | 4058075608498 / AC32686 | | 4058075608634 / AC32797 4058075608610 / AC32800 | |
| Not tested | | | | | | | | |
| Dimmer | | | | | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps |
| Brand | Model | Voltage range | Power | Type | | | | |
| Merten | MEG5137-0000 | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-19% |
| Merten | MEG5134-0000 | 230/50Hz | | | 98-8% | 96-3% | 99-3% | 99-10% |
| Merten | MEG5133-0000 | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-6% |
| Merten | MEG 5131 | 230/50Hz | 40-400 | L | 93-2% | 93-4% | 99-0% | 99-0% |
| Merten | MEG 5135 | 230/50Hz | 60-1000 | L | 100-1% | 100-0% | | 99-0% |
| Merten | MEG 5132 | 230/50Hz | | | 93-2% | 93-4% | 99-0% | 99-0% |
| Merten | MEG 5140 | 230/50Hz | 9-100 | L | 90-5% | 91-5% | 51-0% | 99-0% |
| MK | K4501 | 230/50Hz | 180 | L | 92-5% | 93-2% | 97-3% | 99-4% |
| NEXUS | 881P-01 | 230/50Hz | 400 | L | 93-2% | 97-1% | 83-0% | 99-0% |
| NIKO | 310-0190001901 | 230/50Hz | 5-200 | U | 100-2% | 100-2% | 99-1% | 99-10% |
| NIKO | 330-0070000701 | 230/50Hz | 5-200 | U | 100-6% | 100-5% | 99-8% | 99-8% |
| Odace | S520515 | 230/50Hz | | | 94-4% | 92-4% | 99-10% | 99-4% |
| Odace | S520511 | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-6% |
| Odace | S520512 | 230/50Hz | | | 98-8% | 96-3% | 99-3% | 99-10% |
| Odace | S520518 | 230/50Hz | | | 90-5% | 91-5% | 51-0% | 99-0% |
| Osram | HTi DALI 315 DIM | 230/50Hz | 20-315 | DALI-T | | 96-3% | 99-0% | 99-10% |
| PEHA | 435 HAN | 230/50Hz | 60-600 | L | 90-7% | 91-5% | 99-0% | 99-0% |
| Schneider | 400GLI | 230/50Hz | 40-400 | T | 85-8% | 91-8% | 60-0% | 99-2% |
| Schneider | SBD315RC | 230/50Hz | | | 94-8% | 94-8% | 99-0% | 99-0% |
| Schneider | SBD600RCRL | 230/50Hz | | | 92-2% | 92-0% | 99-0% | 99-0% |
| Schneider | SBD420RCRL | 230/50Hz | | | 94-4% | 92-4% | 99-10% | 99-4% |
| Schneider | SBD630RC | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-19% |
| Schneider | SBD200LED | 230/50Hz | 400 | | 98-8% | 96-3% | 99-3% | 99-10% |
| Schneider | SBD SPL | 230/50Hz | | | 90-5% | 91-5% | 51-0% | 99-0% |
| Schneider | SBD600RL | 230/50Hz | | | 99-8% | 97-2% | 99-12% | 99-6% |
| Schneider | 5170 | 230/50Hz | | | | | 99-6% | 99-6% |
| Schneider | ATTD1000RL | 230/50Hz | | | 97-11% | 95-3% | | 99-0% |
| Schneider | SBD400RL | 230/50Hz | | | 93-2% | 93-4% | 99-0% | 99-0% |

*PAR16 and AR111 versions tested with HTM 70 transformer

DIMMER COMPATIBILITY GlowDim

| Legend | | | | | PARATHOM+ PAR16 50 GLOWdim 36** | PARATHOM PRO AR111 50 GLOWdim * | | | |
|--|------------------|------------------|---------|-----------|---|---|----------------------------|-----------------------------|--|
| Good dimmability with indicated number of lamps (dimming range greater than 75%) | | | | |  EAN / Basic Code |  EAN / Basic Code | | | |
| Limited dimmability with indicated number of lamps (dimming range smaller than 75%) | | | | | | | | | |
| Undesired dimmability | | | | | | | | | |
| Not tested | | | | | 4058075608498 / AC32686 | 4058075608634 / AC32797 4058075608610 / AC32800 | | | |
| Dimmer | | | | | Dimming range 1 Lamp | Dimming range 4 Lamps | Dimming range 1 Lamp | Dimming range 4 Lamps | |
| Brand | Model | Voltage range | Power | Type | | | | | |
| Shuttle | SDIM-T-LED-500W | 230/50Hz | 2-500 | T & LED-T | 96-9% | 93-10% | 99-0% | 99-0% | |
| Siemens | 5TC8 284 | 230/50Hz | 20-525 | T | 92-14% | 92-13% | 99-16% | 99-13% | |
| Siemens | 5WG1-527-1AB31 | 230/50Hz | 20-500 | KNX-U | 97-11% | 95-3% | 99-0% | 99-0% | |
| theben | DIMAX 544 plus P | 230/50Hz | 250 | T | | | 99-0% | 99-15% | |
| theben | DIMAX 534 plus | 230/50Hz | 400 | T | | | 99-0% | 99-9% | |
| VADSBO | LD 220 | 230/50Hz | 1-200 | U | 92-2% | 96-4% | | 99-0% | |
| VARILIGHT | HQ3W | 230/50Hz | 400 | | 96-4% | 97-1% | 99-3% | 99-2% | |
| VARILIGHT | JQP401W | 230/50Hz | 400 | T | 100-11% | 98-10% | 87-6% | | |
| Vimar | 20135 | 230/50Hz | 3 - 100 | U | 98-0% | 98-0% | | 99-4% | |
| ZANO | Z GRID 700 | 230/50Hz | 250 | LED | 91-4% | 88-3% | | | |
| ZANO | WH401 | 230/50Hz | 400 | L | 97-2% | 97-3% | 86-0% | 99-0% | |
| ZANO | WH251 | 230/50Hz | 250 | | 99-3% | 99-1% | 83-0% | 99-0% | |
| ZANO | Z GRID 500 | 230/50Hz | 500 | | 96-3% | 96-1% | | 99-0% | |

*PAR16 and AR111 versions tested with HTM 70 transformer

Please note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

LEDVANCE GmbH

Head Office:

Parkring 29-33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.